

F/UTP CAT6 4PR PVC

STANDARDS

IEC 61156-5
EN 50288-5-1
ISO/IEC 11801
EN 50173
IEC 60332-1-2
EN 60332-1-2

APPLICATIONS

10BASE-T (IEEE 802.3)
4/16 Mbps TOKEN RING (IEEE 802.5)
100BASE-VG-AnyLAN
100 Mbps TP-PMD (ANSI X3T9.5)
100BASE-T (IEEE 802.3)
55/155 Mbps ATM
1000BASE-T (Gigabit Ethernet)
1.2 Gbps ATM
10G BASE-T (Length<50m)

CERTIFICATION



COLOUR CODES

Pairs	Colours Combinations
1	Light Blue / Blue
2	White / Orange
3	Light Green / Green
4	Light Brown / Brown

Sheath colour: Blue


PART NUMBER / PACKAGING

541104CC4PQ / Spools 500m
54114A1C4P / Spools 1000m

OTHER CHARACTERISTICS

Storage Temperature -20°C to 70°C
Operating Temperature -20°C to 70°C

Laying Temperature -5°C to +50°C
(recommendation: between -5°C and +5°C,
prior storage 24h at 20°C.)

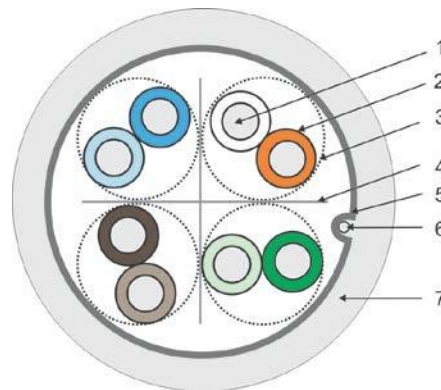

CONSTRUCTION

- 1 – Conductor: 23 AWG, Solid Bare Annealed Copper.
- 2 – Insulation: Polyolefin.
- 3 – Varying short pair lay-length (4 pairs).
- 4 – Cross Filler
- 5 – Overall Aluminium/Polyester foil
- 6 – Tinned copper drain wire.
- 7 – Sheath: PVC material

ELECTRICAL AND DIMENSIONAL CHARACTERISTICS

Max. dc Resistance (Ω/km) @20°C:	95.0
Nom. Mutual Capacity (nF/km)@1kHz:	56
NVP (% of light speed):	72
Mean input Impedance (Ω):	100 ± 5 @ 100MHz
Propagation delay (ns@10MHz):	max. 518
Delay Skew (ns/100m):	max. 40
Coupling Att dB (min.):	@30-100MHz 55 @100-1000MHz 55-20log(f/100)

Approx. outer diameter (mm):	6.6
Approx. weight (kg/km):	45.0
Min. bending radius (mm):	26.4
Calorific Value (MJ/m):	0.891

TRANSMISSION CHARACTERISTICS

Freq	ATTN	NEXT	PS-NEXT	ELFEXT	PS-ELFEXT	ACR	PS-ACR	RL
				(ACR-F)	(PSACR-F)			
MHz	dB/100m (max.)	dB (min.)	dB (min.)	dB/100m (min.)	dB/100m (min.)	dB/100m (min.)	dB/100m (min.)	dB (min.)
1*	2.1	75.3	72.3	68.0	65.0	73.2	70.2	20.0
4	3.8	66.3	63.3	58.0	55.0	62.5	59.5	23.0
8	5.2	61.8	58.8	51.9	48.9	56.5	53.5	24.5
10	5.9	60.3	57.3	50.0	47.0	54.4	51.4	25.0
16	7.4	57.2	54.2	45.9	42.9	49.9	46.9	25.0
25	9.2	54.3	51.3	42.0	39.0	45.0	42.0	24.3
31.25	10.3	52.9	49.9	40.1	37.1	42.6	39.6	23.6
62.5	14.5	48.4	45.4	34.1	31.1	33.8	30.8	21.5
100	18.4	45.3	42.3	30.0	27.0	26.9	23.9	20.1
155	22.9	42.4	39.4	26.2	23.2	19.5	16.5	18.8
200	26.1	40.8	37.8	24.0	21.0	14.7	11.7	18.0
250	29.2	39.3	36.3	22.0	19.0	10.1	7.1	17.3
300*	32.0	38.1	35.1	20.5	17.5	6.1	3.1	17.3
350*	34.7	37.1	34.1	19.1	16.1	2.5	1.0	17.3

Edition: January 2013

* For information only.

PORTUGAL

Tlf. +351 21 967 85 00

Wires and cables are not suitable for low impedance applications as earthing, etc

info@generalcable-pt.com

FRANCE

Tlf. +33(0)1 60 57 31 51

contact@ilecable.com

SPAIN

Tlf. +34 93 227 97 00

info@generalcable.es